



## EZ-1:

- **Safety first:** functionality and design excellence to operate safely
- **Next generation electronics:** advanced technology for maximum durability and reliability
- **Reduced power consumption:** more efficiency, less costs, more green!


**EZ-1**, automatic stretch packager with **EZ-1** technology of the last generation, particularly suitable for **in-store applications**, differs from previous series by achieving higher targets in terms of **safety, technology** and **economy**.

The additional photocells added at the feed entrance, the next-generation microswitches designed to prevent tampering, the innovative design of the discharge which prevents any access to the moving parts, the gas springs for the opening of the exit device ensures users to operate in **complete safety**.

The **next generation electronics** featured in **EZ-1** ensures maximum durability and reliability of the machine even in problematic environments.

Thanks to the sealing belt on the outlet tray equipped with smart stand-by mode and to the new outfeed, **EZ-1** can reduce energy consumption and heat dissipation **saving up to 50%** compared to previous series.

### Main characteristics

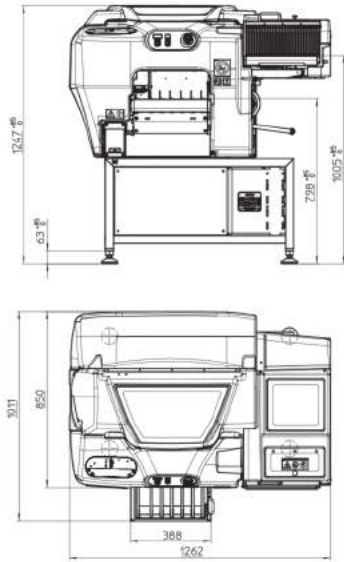

#### Safety first

Every part of **EZ-1** has been designed in compliance with the strictest **safety regulations**. The elegant **rounded lines** also reduce the consequences of accidental impact.

#### Speed

**EZ-1** reaches a speed of **21 ppm: 5%** more than the previous model.

#### Automatic reading

**EZ-1** requires no operator intervention in the event of a **format change**: this makes it particularly suitable for **in-store applications**.

#### Super-stretch technology

Thanks to the **EZ-1** technology, **EZ-1** uses **one width films (280 mm)** regardless of the size of the product, allowing a **saving of film up to 20%** compared to traditional packaging machines.

#### Compactness

With a **frontal** configuration, and a footprint of about **1 m<sup>2</sup>**, **EZ-1** manages to fit into any work environment, optimizing the available space.

#### Maximum integration

**EZ-1** can be integrated optimally with the major **manual weigh-price labelling systems** available on the market, keeping volume and footprint virtually unchanged.

#### Versatility

With a wide choice of **options**, **EZ-1** can be easily customized according to customer **requirements**.

#### Simplicity

Characterized by an extremely intuitive and easy to remember operation, **EZ-1** simplifies the turnover of employees. It only takes **30"** to change the reel: an error-proof, simple operation!

#### Proper professional packaging

The synergy between the new **EZ-1** series machines and food-grade films allows the realities operating in food packaging achieving maximum results with minimum investment. **EZ-1** can use **neutral super-stretch film** or **continuously printed film** which seals on the lower part of the tray thanks to the efficiency of the sealing belt.

#### Plug 'n' Pack mode

**EZ-1** is powered by **230 V** without any need for compressed air.

#### Energy saving

With a new advanced software, **EZ-1** is able to manage its own ignition timing in on/off mode, thus optimising consumption and offering energy savings of up to **50%**.

**21** Maximum speed: up to 21 packages a minute.

**120** Minimum tray format: 120 x 100 x 10" (L x W x H).

**350** Maximum tray format: 350 x 230 x 130" (L x W x H).

**280** Reel width: 280 mm (one width).

**32** Optional features from the list.

**30** Reel change time 30".

**170** Machine weight: 170 kg.

**230** Supply voltage: 230 V mono-phase

\*It is not possible to achieve the three maximum dimensions of the tray at the same time

